


FEATURES

- Heavy-duty, brushed stainless steel exterior with enclosed liner, available in multiple widths.
- Internal, in-line or remote blower required.
- Welded seams, hemmed edges and hand-finished craftsmanship.
- Recessed easy-access controls.
- Infinite-speed blower control.
- Heat sentry to automatically turn unit on when heat is sensed and adjust blower speed.
- Halogen lighting with two settings.
- Removable, dishwasher-safe stainless steel baffle filters.

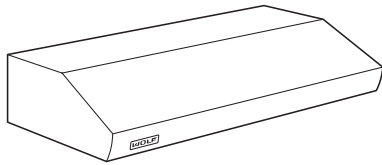

Model PW482210

MODEL OPTIONS	
30" Width	PW302210
36" Width	PW362210
42" Width	PW422210
48" Width	PW482210

ACCESSORIES

- Internal, in-line and remote blowers (refer to chart).
- 38" high stainless steel backsplash with or without warming racks.
- 6", 12", 18", 24" and 30" high stainless steel duct covers.
- Recirculating kit and filter for non-ducted applications (internal blower).
- Transition to 10" round duct.
- Make-up air damper.


Accessories available through an authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.

BLOWER OPTIONS	INTERNAL					IN-LINE		REMOTE			
CFM	300	450	500	600	900	600	1100	600	900	1200	1500
PW302210, PW362210			•			•		•	•		
PW422210, PW482210						•		•	•		

SPECIFICATIONS

PRODUCT	
Width	30", 36", 42", 48"
Height	10"
Depth	22"
Weight	39–55 lb
DISCHARGE	
Adjustable	14" x 3 1/4"
ELECTRICAL	
Supply	120 VAC, 60 Hz
Service	15 amp circuit
INSTALLATION	
Bottom of Hood to Countertop	30–36"

DIMENSIONS

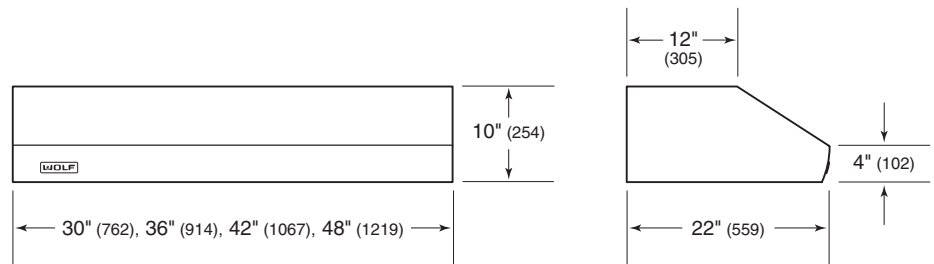


Pro ventilation hoods are sold as a shell only. An internal, in-line or remote blower is required. For blower recommendations, visit our website, wolfappliance.com.

Specifications are subject to change without notice. Visit wolfappliance.com/specs for the most up-to-date information.

Dimensions may vary ±1/8" (3). Dimensions in parentheses are millimeters unless otherwise specified.

ELECTRICAL LOCATION

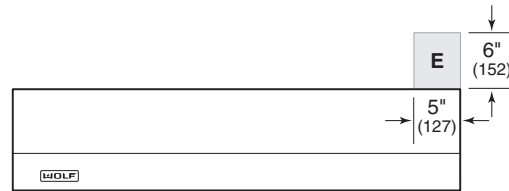

30" (762) TO 36" (914) BOTTOM EDGE TO COUNTERTOP